




SEPITAM

ONE STEP SMARTER

www.sepitam.com

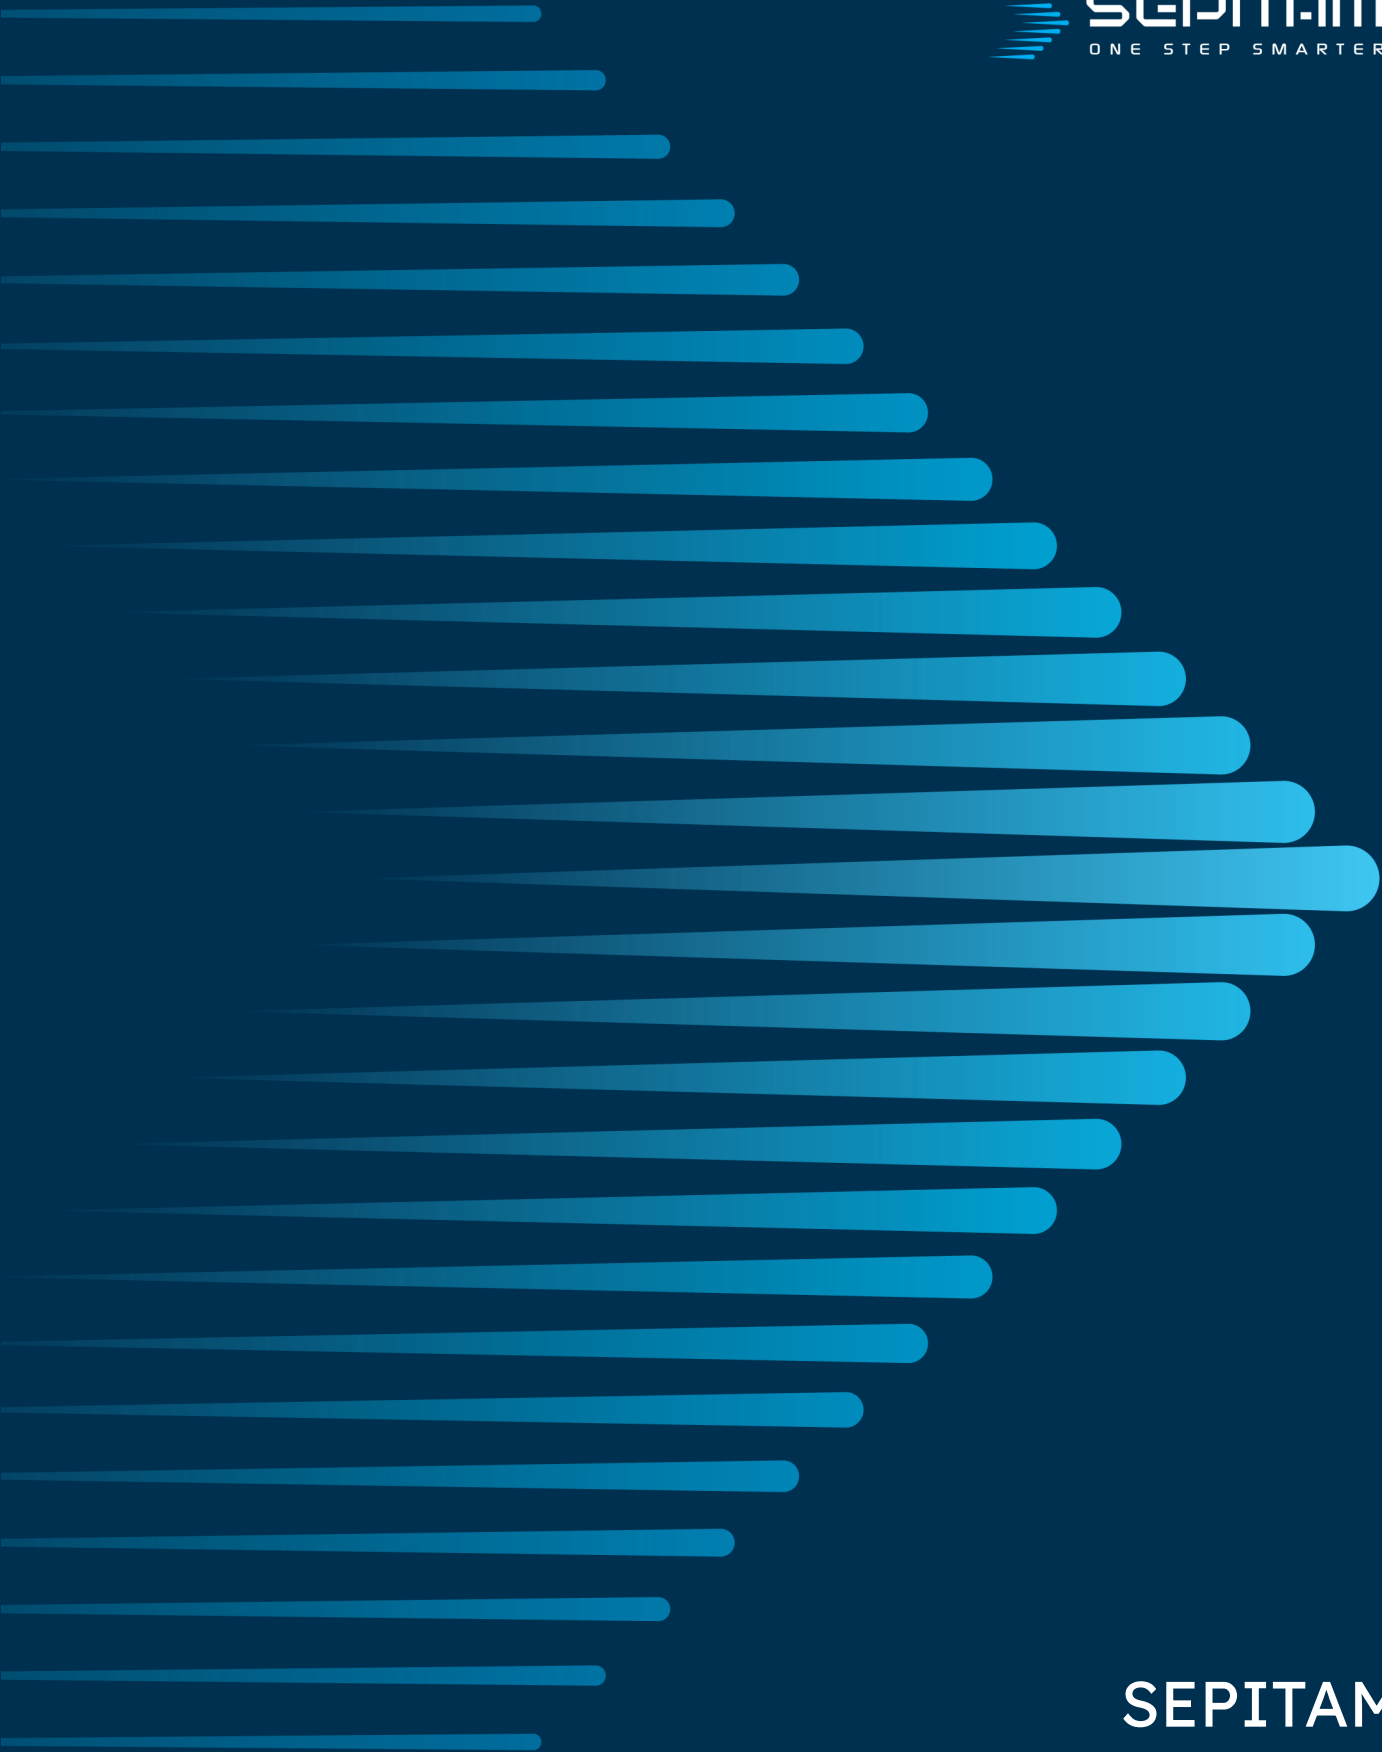

SEPITAM
SFP1G-SM-DX-20KM



TYPE:

Sepitam-SFP1G-SM-DX-20KM

Sepitam SFP optical transceiver modules support data transmission rates ranging from 1Gbps to 10Gbps. These modules operate at basic and WDM wavelengths and are available in both industrial and non-industrial grades. They are compatible with single-mode and multi-mode optical fibers, covering transmission distances from 20 km to 120 km.



- ▶ TYPE: Sepitam-SFP1G-SM-DX-20KM
- ▶ 1.25Gbps Single mode dual fiber 1310nm
- ▶ Optical Transceiver 20km

▶ Description:

The SFP transceivers are high performance, cost effective modules supporting dual data-rate of 1.25Gbps/1.0625Gbps and 20km transmission distance with SMF.

The transceiver consists of three sections: a FP laser transmitter, a PIN photodiode integrated with a trans-impedance preamplifier (TIA) and MCU control unit. All modules satisfy class I laser safety requirements.

The transceivers are compatible with SFP Multi-Source Agreement (MSA) and SFF-8472. For further information, please refer to SFP MSA.

▶ Properties:


- FP laser transmitter and PIN photo-detector
- Dual Data-rate of 1.25Gbps/1.0625Gbps Operation
- Up to 20KM transmission distance on 9/125µm SMF
- Compliant with SFP MSA and SFF-8472 with duplex LC receptacle
- Digital Diagnostic Monitor Interface
- Very low EMI and excellent ESD protection
- +3.3V single power supply
- Compatible with RoHS
- Operating case temperature:
 - Commercial: 0°C to +70°C
 - Extended: -10°C to +80°C
 - Industrial: -40°C to +85°C



► Applications:

- Gigabit Ethernet
- Fiber Channel
- Switch to Switch interface
- Switched backplane applications
- Router/Server interface
- Other optical transmission systems

► Functional Diagram:

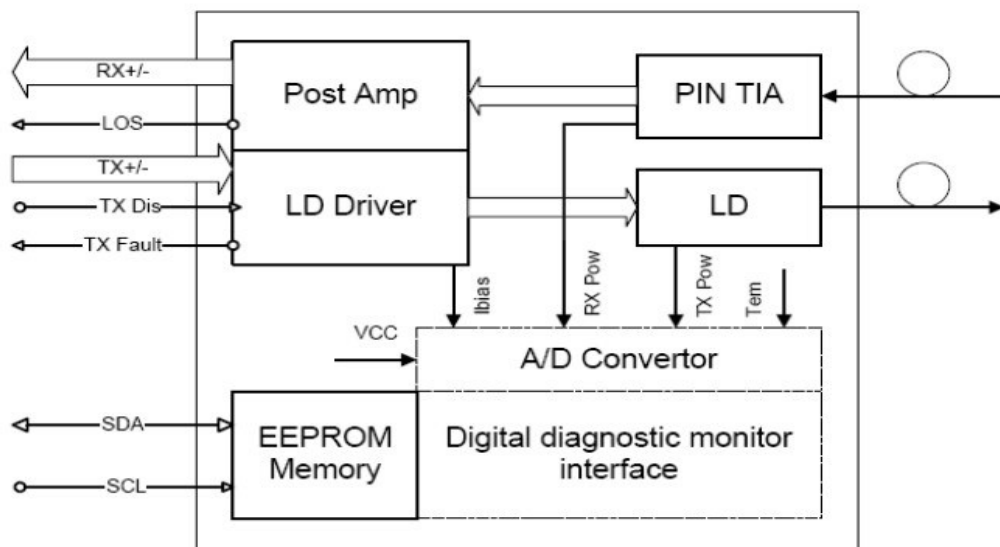



▶ Absolute Maximum Ratings:

Parameter	Symbol	Min.	Max.	Unit	Note
Supply Voltage	Vcc	-0.5	4.0	V	–
Storage Temperature	–	-40	85	°C	–
Relative Humidity	–	5	85	%	–

▶ General Operating Characteristics:

Parameter		Symbol	Min.	Type	Max.	Unit	Notes
Data Rate	Gigabit Ethernet	–	–	1.25	–	Gb/s	–
	Fiber Channel	–	–	1.0625	–		
Supply Voltage	Vcc	3.1	3.3	3.5	V	–	
Supply Current	Icc	–	–	220	mA	–	
Operating Case Temperature	Tc	0	–	70	°C	–	
		-10	–	80			
		-45	–	85			



▶ Electrical Input/Output Characteristics

▶ Transmitter

Parameter	Symbol	Min.	Type	Max.	Unit	Notes	
Diff. Input Voltage Swing	–	300	–	1800	mVpp	1	
Tx Disable Input	H	V_{IH}	2.0	–	$V_{CC}+0.3$	V	–
	L	V_{IL}	0	–	0.8		
Tx Fault Output	H	V_{OH}	2.0	–	$V_{CC}+0.3$	V	2
	L	V_{OL}	0	–	0.8		
Input Diff. Impedance	Z_{in}	-	100	–	Ω	–	

▶ Receiver

Parameter	Symbol	Min.	Type	Max.	Unit	Notes	
Diff. Output Voltage Swing	–	400	–	1000	mVpp	3	
Rx LOS Output	H	V_{OH}	2.0	–	$V_{CC}+0.3$	V	2
	L	V_{OL}	0	–	0.8		

- Note 1) TD+/- are internally AC coupled with 100 Ω differential termination inside the module.
- Note 2) Tx Fault and Rx LOS are open collector outputs, which should be pulled up with 4.7k to 10k Ω resistors on the host board. Pull up voltage between 2.0V and $V_{CC}+0.3V$.
- Note 3) RD+/- outputs are internally AC coupled, and should be terminated with 100 Ω (differential) at the user SERDES.



▶ Optical Characteristics:

▶ Transmitter

Parameter	Symbol	Min.	Type	Max.	Unit	Notes
Ave. Output Power (Enable)	10km	-9	-	-3	dBm	1
	20km	-	-	-		
Extinction Ratio	ER	9	-	-	dB	1
Rise/Fall Time (20%-80%)	Tr-Tf	-	-	0.26	ns	2
Wavelength Range	-	1270	-	1360	nm	-
Spectral Width (RMS)	-	-	-	4	nm	-
Output Optical Eye	Compliant with IEEE802.3 z (class 1 user safety)					


▶ Receiver

Parameter	Symbol	Min.	Type	Max.	Unit	Notes
Operating Wavelength	-	1270	-	1610	nm	-
Sensitivity	10km	-	-	-22	dBm	3
	20km	-	-	-		
Min. Overload	Pimax	-3	-	-	dBm	3
LOS Assert	Pa	-35	-	-	dBm	-
LOS De-assert	Pd	-	-	-23	dBm	-
LOS Hysteresis	Pd-Pa	0.5	-	6	dB	-

- Note 1) Measured at 1250 Mb/s with PRBS 223 – 1 NRZ test pattern.
- Note 2) Unfiltered, measured with a PRBS 223-1 test pattern @1.25Gbps
- Note 3) Measured at 1250 Mb/s with PRBS 223 – 1 NRZ test pattern for BER < 1x10⁻¹



Pin Definitions and Functions:

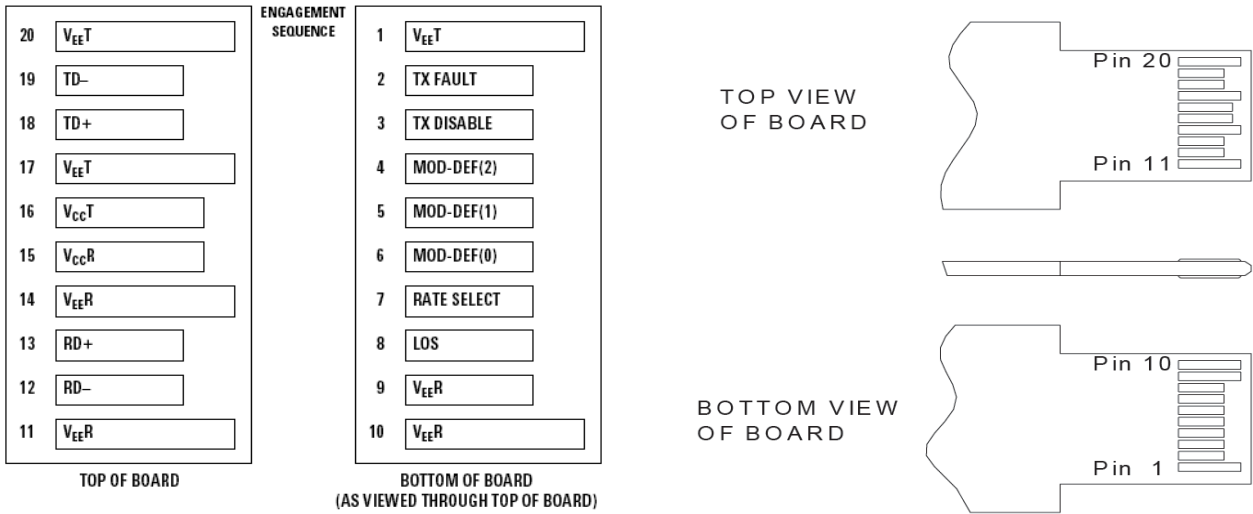

PIN#	Name	Function	Notes
1	VeeT	Tx ground	-
2	Tx Fault	Tx fault indication, Open Collector Output, active "H"	1
3	Tx Disable	LVTTL Input, internal pull-up, Tx disabled on "H"	2
4	MOD-DEF2	2 wire serial interface data input/output (SDA)	3
5	MOD-DEF1	2 wire serial interface clock input (SCL)	3
6	MOD-DEF0	Model present indication	3
7	Rate select	No connection	-
8	LOS	Rx loss of signal, Open Collector Output, active "H"	4
9	VeeR	Rx ground	-
10	VeeR	Rx ground	-



PIN#	Name	Function	Notes
11	VeeR	Rx ground	-
12	RD-	Inverse received data out	5
13	RD+	Received data out	5
14	VeeR	Rx ground	-
15	VccR	Rx power supply	-
16	VccT	Tx power supply	-
17	VeeT	Tx ground	-
18	TD+	Transmit data in	6
19	TD-	Inverse transmit data in	6
20	VeeT	Tx ground	-

- Note 1) When high, this output indicates a laser fault of some kind. Low indicates normal operation. And should be pulled up with a 4.7 – 10K Ω resistor on the host board.
- Note 2) TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7 – 10K Ω resistor. Its states are:

Low (0 – 0.8V): Transmitter on	(>0.8, < 2.0V): Undefined
High (2.0V~Vcc+0.3V): Transmitter Disabled	Open: Transmitter Disabled
- Note 3) Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7K – 10K Ω resistor on the host board. The pull-up voltage shall be VccT or VccR.
 - Mod-Def 0 has been grounded by the module to indicate that the module is present
 - Mod-Def 1 is the clock line of two wire serial interface for serial ID
 - Mod-Def 2 is the data line of two wire serial interface for serial ID
- Note 4) When high, this output indicates loss of signal (LOS). Low indicates normal operation.
- Note 5) RD+/-: These are the differential receiver outputs. They are AC coupled 100 Ω differential lines which should be terminated with 100 Ω (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board.
- Note 6) TD+/-: These are the differential transmitter inputs. They are AC-coupled, differential lines with 100 Ω differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board.




▶ Diagnostics:


▶ Diagnostics Specification

Parameter	Range	Unit	Accuracy	Calibration
Temperature	0 to +70 , -40 to +85	°C	±3°C	Internal/ External
Voltage	3.0 to 3.6	V	±3%	Internal/ External
Bias Current	2 to 80	mA	±10%	Internal/ External
TX Power	-11 to -1	dBm	±3dB	Internal/ External
RX Power	-25 to 0	dBm	±3dB	Internal/ External

▶ Typical Interface Circuit

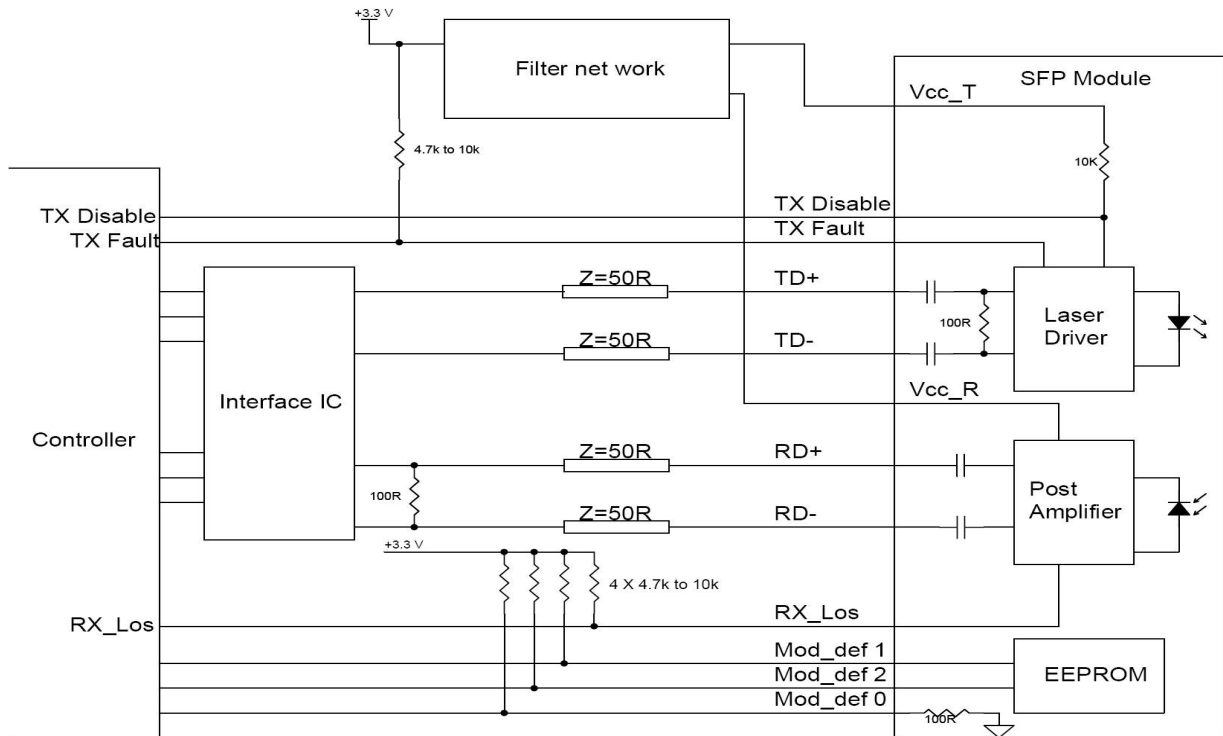

Technical Specification of Sepitam-SFP1G-SM-DX-20KM

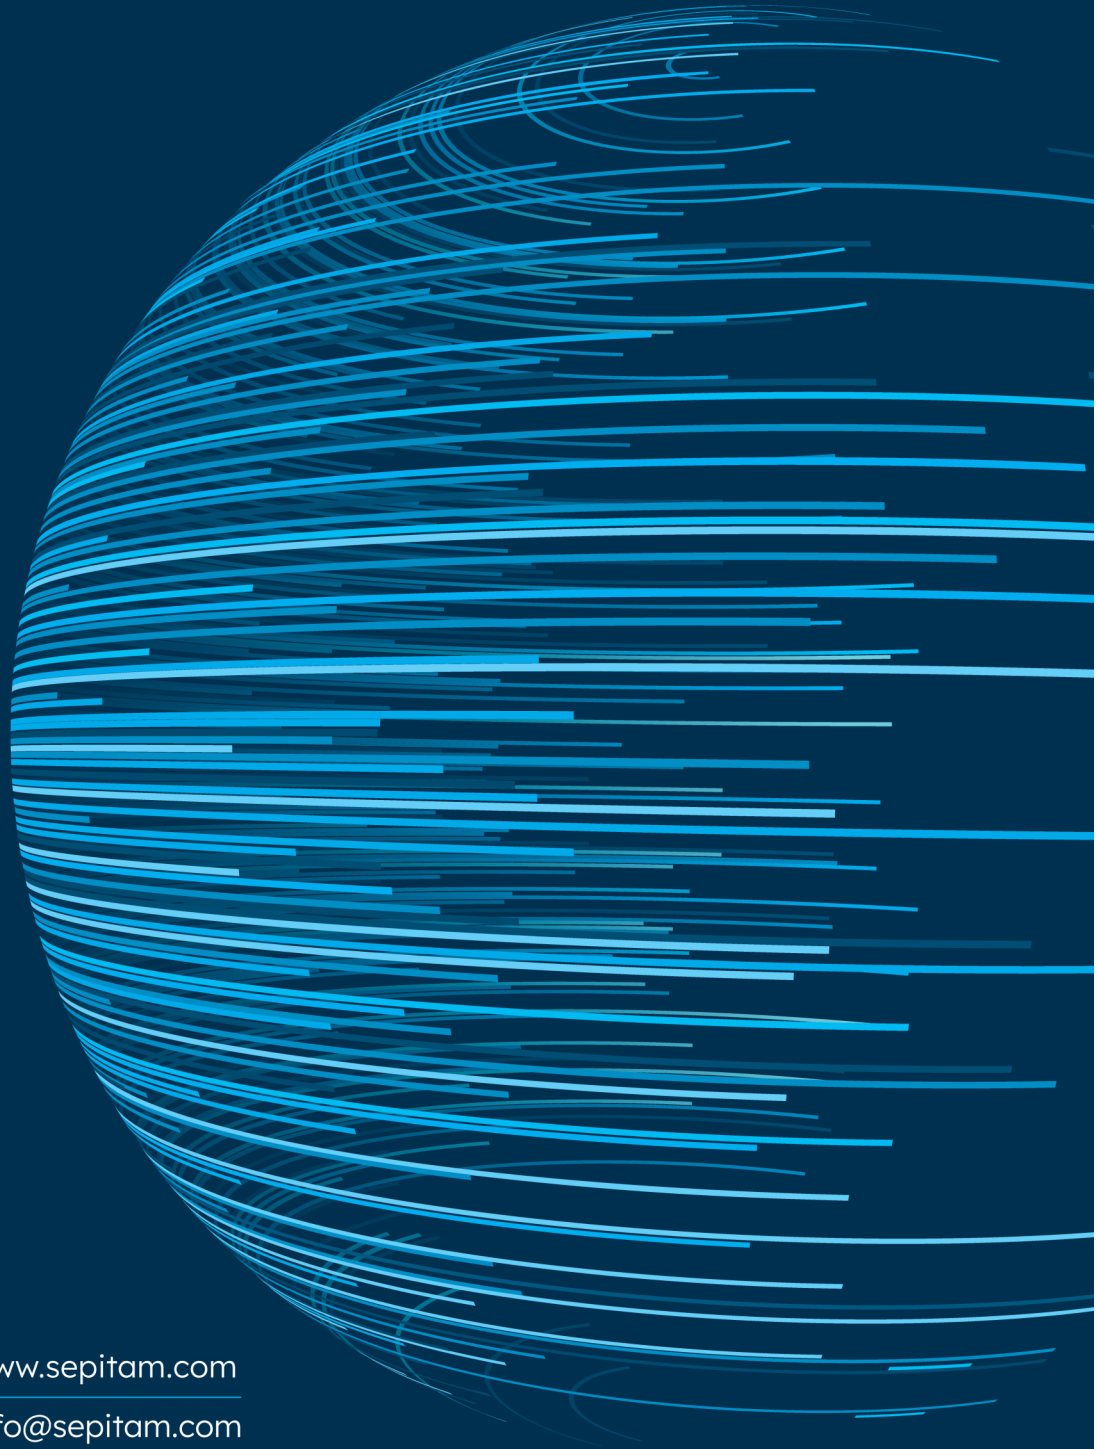

www.sepitam.com

Info@sepitam.com