



**SEPITAM**  
ONE STEP SMARTER

---

[www.sepitam.com](http://www.sepitam.com)



**SEPITAM**  
**PI608G-QFDGM-bt**



TYPE:

**Sepitam-PI608G-QFDGM-bt**

Industrial Ethernet Switches can be implemented in outdoor projects and challenging environments due to their stable performance in harsh environmental conditions, including a wide range of temperatures, high humidity, and electromagnetic radiation. PoE technology in these products greatly contributes to the easier power supplying of various network devices, and its management and configuration capabilities provide optimal performance.



- ▶ TYPE: Sepitam-PI608G-QFDGM-bt
- ▶ Technical Specification of Sepitam-PI608G-QFDGM-bt
- ▶ 8\*10/100/1000Base-T PoE (bt) Downlink Ports & 2\*10/100/1000Base-T, 4\*10/100/1000Base-X SFP Uplink Ports Industrial Managed Switch

## ▶ **Description:**

The Sepitam-PI608G-QFDGM-bt is a full Gigabit managed industrial PoE switch. it has 8\*10/100/1000M PoE ports and 2\*10/100/1000M RJ45 ports and 4\*100/1000M SFP fiber slot ports , port 1-8 can supports IEEE 802.3af/at/bt standard POE power supply, single port POE power up to 90W, and the maximum POE output power is 480W. As a POE power supply device, it can automatically detect and identify the electrical equipment that meets the standard and supply power through the cable. It can supply the POE terminal equipment, such as wireless AP, network camera, network telephone, industrial sensor and so on, to meet the demand for high density PoE power supply network environment. It is suitable for intelligent transportation, rail transportation, electric power industry, mining, metallurgy and green energy construction and so on. A reliable communication networks.

Managed model supports a variety of network redundancy protocol STP/RSTP/MSTP (<50ms). When one-way network fails, communication can be recovered quickly to ensure uninterrupted communication of important applications. The Sepitam-PI608G-QFDGM-bt industrial series products fully follow industrial product design and material. The shell adopts aluminum alloy to enhance heat dissipation efficiency, IP40 protection grade, and ensures the stable operation of the equipment in bad environment. According to the actual application needs, through Web, CLI, SNMP network management, POE power supply management, port flow control, VLAN division, STP, RSTP and other functions of the application service configuration.



## ► Properties:

- 10\*10/100/1000M + 4\*100/1000M SFP fiber Port Industrial PoE Switch, 1-8 ports support IEEE 802.3af/at/bt
- PoE port support AF/AT/BT intelligent recognition. Standard power is 90W/port, Maximum power: 95W/port; With PoE isolation from the rest
- Only support 1,2(+)/3,6(-);
- Support L2+ full network management, PoE network management and configuration;
- Input voltage: DC48-57V, Redundant dual power 5-bit industrial terminals;
- IP protection level: IP40; Rail-type installation
- Rail-type installation

## ► Specifications:

Model	Sepitam-PI608G-QFDGM-bt
Interface	8*10/100/1000Base-T PoE ports (Data/Power) 2*10/100/1000Base-T uplink RJ45 ports (Data) 4*100/1000Base-X uplink SFP slot ports (Data) 1 * RS232 console port(115200, N,8,1) 2 set of V+, V- redundant DC power interface (5 Pin Phoenix terminal) Single-pole double throw switch (FAULT)
PoE Port	Port 1-8 supports POE @ IEEE802.3af/at/bt
Network Management Type	L2+
PoE Standard	IEEE802.3af/at /bt
Forwarding Mode	Store and Forward



Model	Sepitam-PI608G-QFDGM-bt
Network Protocol	IEEE802.3 10BASE-T IEEE802.3u 100BASE-T/TX IEEE802.3ab 1000BASE-T IEEE802.3z 1000BASE-X IEEE802.3u 100BASE-FX IEEE802.3x.
SFP Port Characteristic	Gigabit SFP optical fiber interface, default matching optical modules, need to buy separately, (optional order mode / multi-mode, single fiber / double fiber optical module.
Switching Capacity	256bps (Non-blocking)
Forwarding Rate@ 64byte	20.83Mpps
MAC	16K
Buffer Memory	6M
Jumbo Frame	10K
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP ( $\leq$ 100 meter) 100BASE-TX: Cat5 or later UTP ( $\leq$ 100 meter) 1000BASE-T: Cat5e or later UTP ( $\leq$ 100 meter)
Optical Cable	Multimode: 850nm 0 ~ 500M; Single mode: 1310nm 0 ~ 40KM, 1550nm 0 ~ 120KM.
Power Supply Pin	Default 1/2(+), 3/6(-);
Working Voltage	48-57VDC; 6 Pin industrial Phoenix terminal, support anti-reverse protection.
Max Power Per Port	95W; IEEE802.3af/at/bt



Model	Sepitam-PI608G-QFDGM-bt
Total PWR / Input Voltage	480W (48-57VDC)
Power Consumption	Standby:<10W; Full load:<480W
LED Indicator	Power indicator: PWR (Green); Network indicator: 1-10(Link/Act)/(Green),11-14(Link/Act)/(Green); POE indicator: PoE (Orange)
Power Supply	No, optional 48V/120W or 48V/240W or 48V/480W industrial power supply
Reset Switch	Yes, One-button factory reset
Operation TEMP / Humidity	-40~+75°C;5%~95% RH Non condensing
Storage TEMP / Humidity	-40~+85°C;5%~95% RH Non condensing
Dimension	165*148*54mm
Net /Gross Weight	<1.1kg / <1.5kg
Lightning protection / Protection level	Lightning protection: 6KV 8/20us; Protection level: IP40 IEC61000-4-2(ESD): ±8kV contact discharge, ±15kV air discharge IEC61000-4-3(RS):10V/m(80~1000MHz) IEC61000-4-4(EFT): power cable: ±4kV; data cable: ±2kV IEC61000-4-5(Surge): power cable: CM ±4kV/DM ±2kV; data cable: ±4kV IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz) IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m, 1s to 3s IEC61000-4-9(pulsed magnet field):1000A/m IEC61000-4-10(damped oscillation):30A/m 1MHz IEC61000-4-12/18(shockwave):CM 2.5kV, DM 1kV IEC61000-4-16(common-mode transmission):30V; 300V,1s FCC Part 15/CISPR22(EN55022): Class B IEC61000-6-2(Common Industrial Standard)
Certification	CCC; CE mark, commercial; CE/LVD EN60950; FCC Part 15 Class B; RoHS;
<b>Business features (only restricted management function models)</b>	
Port	Support IEEE802.3x flow control (full duplex)
	Support for broadcast storm suppression based on port rate
	support speed limit for incoming and offline message traffic, with a minimum particle size of 64Kbps.
	Support port temperature protection settings
	Support port EEE green Ethernet energy saving configuration




Model	Sepitam-PI608G-QFDGM-bt
PoE Management	<ul style="list-style-type: none"> <li>Support total power limit configuration for POE power supply</li> <li>Support PoE output power allocation per port, close / start af/at</li> <li>Support PoE output priority configuration per port</li> <li>Support PoE work status per port display</li> <li>Support power delay start</li> <li>Support PoE work and time scheduling</li> </ul>
Layer 3 Function	<ul style="list-style-type: none"> <li>L2+ Network management</li> <li>IPV4/IPv6 management</li> <li>L3 soft routing forwarding,</li> <li>Static route, Default route @ 128 pcs, APR @ 1024 pcs</li> </ul>
VLAN	<ul style="list-style-type: none"> <li>4K VLAN based on port, IEEE802.1q</li> <li>VLAN based on the protocol</li> <li>VLAN based on MAC</li> <li>Voice VLAN, QinQ configuration</li> <li>Port configuration of Access, Trunk, Hybrid</li> </ul>
Port Aggregation	<ul style="list-style-type: none"> <li>LACP, Static aggregation</li> <li>Max 7 aggregation groups and 8 ports per group</li> </ul>
Spanning Tree	STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)
Industrial Ring Network Protocol	<ul style="list-style-type: none"> <li>G.8032 (ERPS), Recovery time less than 20ms</li> <li>255 Ring at most, Max 1024 devices per ring.</li> </ul>
Multicast	<ul style="list-style-type: none"> <li>IGMP Snooping v1/v2/v3, Max 1024 multicast groups, Fast log out</li> <li>MLD Snooping v1/v2, Multicast VLAN</li> </ul>
Mirror	Bi-directional traffic mirroring supporting the basic port
QoS	<ul style="list-style-type: none"> <li>Support Diff-Serv QoS</li> <li>Each port supports 8 output queues</li> <li>Support 802.1p/DSCP priority mapping</li> <li>Support queue scheduling mechanism (SP, WRR, SP+WRR)</li> <li>Support priority tag Mark/Remark</li> <li>Support stream-based packet filtering</li> <li>Support for stream-based redirection</li> <li>Support flow-based speed limit</li> </ul>
ACL	<ul style="list-style-type: none"> <li>Support L2 to L4 packet filtering function, can match the first 80 bytes of the message, provide based on the source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN and other definition ACL.</li> <li>Support ACL based on port and VLAN</li> </ul>



Model	Sepitam-PI608G-QFDGM-bt
Safety Characteristics	<ul style="list-style-type: none"> <li>Support user grading management and password protection</li> <li>Support IEEE802.1X authentication / centralized MAC address authentication</li> <li>Support AAA&amp;RADIUS authentication</li> <li>Support the number of MAC address learning restrictions</li> <li>Support MAC address black hole</li> <li>Support SSH 2.0 to provide secure passwords for user login.</li> <li>Support SSL to ensure data transmission security</li> <li>Support port isolation</li> <li>Support the speed limit function of ARP message</li> <li>Support IP source address protection</li> <li>Support ARP intrusion detection function</li> <li>Support against DoS attacks</li> <li>Support port broadcast message suppression</li> <li>Support host data backup mechanism Binding capabilities of IP+MAC+VLAN+ ports</li> </ul>
DHCP	<ul style="list-style-type: none"> <li>Support DHCP Client</li> <li>Support DHCP Snooping</li> <li>Support DHCP Server</li> <li>Support DHCP Relay</li> </ul>
Management and Maintenance	<ul style="list-style-type: none"> <li>Support Console/AUX Modem/Telnet/SSH2.0 CLI command line configuration</li> <li>Support WEB network management (HTTPS)</li> <li>Support FTP, TFTP, Xmodem, SFTP file download management</li> <li>Support SNMP V1/V2C/V3</li> <li>Support one bond reduction</li> <li>Support NTP clock</li> <li>Support system work log</li> <li>Support Ping detection</li> <li>Support cable state detection</li> <li>Support CPU instant utilization status view</li> <li>Support link layer discovery protocol LLDP</li> <li>Support NMS intelligent management center</li> </ul>
System Requirements	<ul style="list-style-type: none"> <li>Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer10 or later;</li> <li>Cat5e or later Ethernet cable;</li> <li>TCP/ IP, network adapter and network operating system (Microsoft Windows, Linux or Mac OS X) installed on every computer in the network.</li> </ul>

# Technical Specification of Sepitam-PI608G-QFDGM-bt

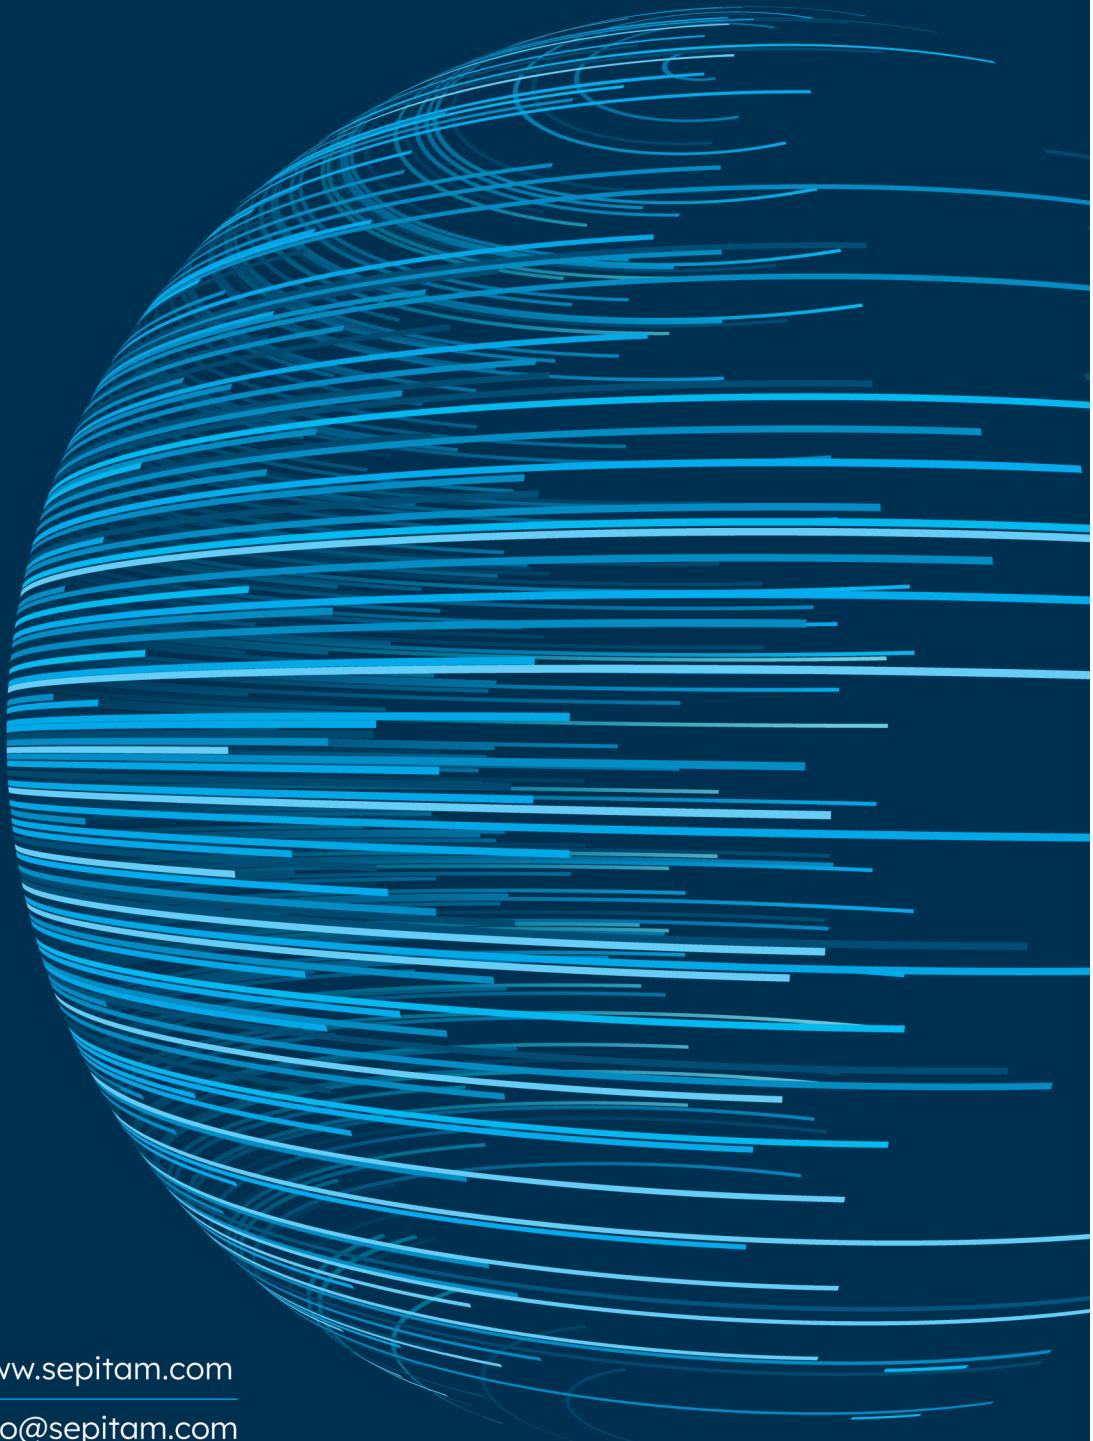

[www.sepitam.com](http://www.sepitam.com)

[Info@sepitam.com](mailto:Info@sepitam.com)